



## MODEL 10


CONCRETE OUTPUT PER HOUR

# 117 CU YD

## 90 M<sup>3</sup>



Single freight mobile concrete plant, with cement silo included. Gravity aggregate storage with 3 separate compartments. Our best seller.

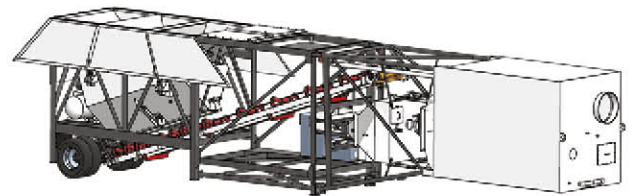



Concrete output per hour	115 cu. yd. / 88 m <sup>3</sup>
Concrete per batch (CPMB)	10 cu. yd. / 7.6 m <sup>3</sup>
Aggregate batchers	1
Aggregate batcher capacity	14 cu. yd. / 11 m <sup>3</sup>
Aggregate bin	39 cu. yd. / 53 Ton
Aggregate compartments	3
Cement silo	40 Ton
Cement batcher	10 cu. yd. concrete per batch CPMB
Automatic batch control	Ready for any brand
Plant certification	CPMB

Travel Length: 61' - Travel Height: 14' - Travel Width: 12'

For more information and details please contact our sales department.

