



MODEL 4000



CONCRETE OUTPUT PER HOUR

65 - 100 CUYD

50 - 75 M³



This model is designed for high mobility and quick set up. It has two decumulative batchers for 2 or 3 aggregate compartments, one for gravel and the other for sand. Each with it's own discharge gate.

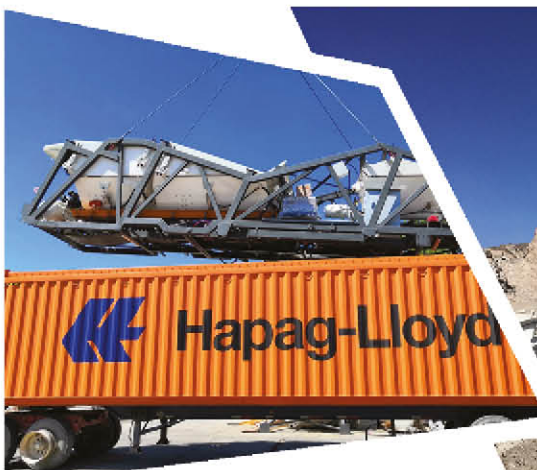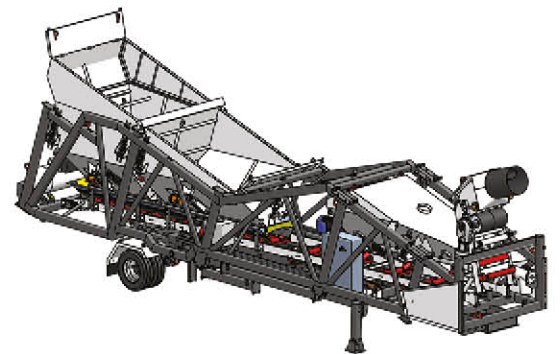

Concrete output per hour 65 - 100 cu. yd. / 50 - 75 m³

Concrete per batch (CPMB) 6 cu. yd. / 4.6 m³

Aggregate batchers 2

Aggregate batcher 1 capacity 7 cu. yd. / 5.5 m³

Aggregate batcher 2 capacity 10 cu. yd. / 7.5 m³

Aggregate compartments 2 - 3

Gravity cement silo 44 Ton

Cement batcher 1.8 Ton / 3,900 Lb

Automatic batch control Ready for any brand

Transport system Included

Plant certification CPMB

Travel Length: 39' - Travel Height: 13' - Travel Width: 7'

For more information please contact our sales department.



