



MODEL 6LP


CONCRETE OUTPUT PER HOUR

100 CUYD

75 M3



Low profile batch plant with cement silo and aggregate storage included. Self erecting system for an easy set up. Ideal for restricted construction sites and for changing locations frequently.

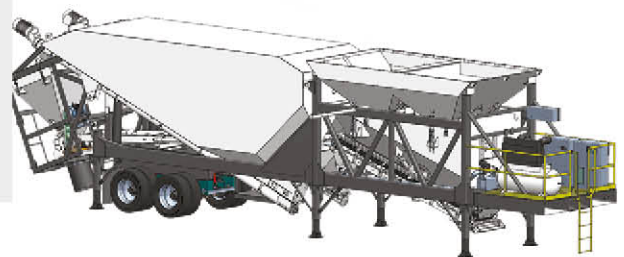

Concrete output per hour	100 cu. yd. / 75 m3
Concrete per batch (CPMB)	6 cu. yd. / 4.5 m3
Aggregate batchers	1
Aggregate batcher capacity	9 cu. yd. / 7 m3
Aggregate bin	16 cu. yd. / 22 Ton
Aggregate compartments	2 - 4
Cement silo	40 - 60 Ton
Cement batcher	4,600 Lb / 2,100 Kg
Automatic batch control	Ready for any brand
Plant certification	CPMB

Travel Length: 53' - Travel Height: 14' - Travel Width: 9'

For more information please contact our sales department.



